
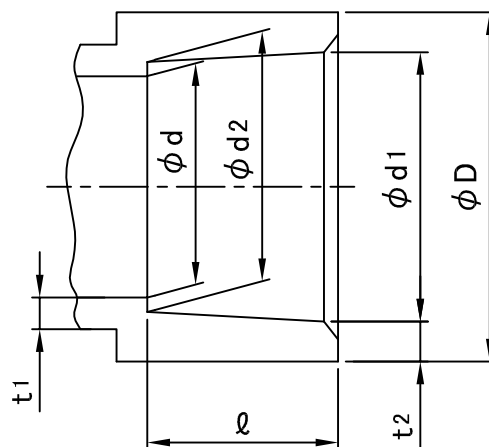


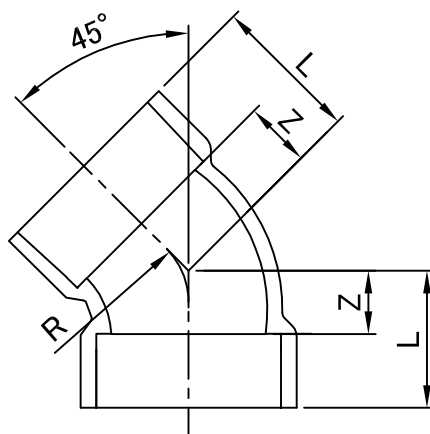

接合部寸法

単位:mm

対象品	呼び径	d1	d2	ℓ	d	t1 (最小)	t2 (最小)	D	Z $\pm$ 2	L	R	参考質量 (kg)
	30	38.25 $\pm$ 0.25	37.85 $\pm$ 0.25	18 $\pm$ 1	31.0 $\pm$ 0.8	2.7	2.5	44	12	30	29	0.04
	40	48.30 $\pm$ 0.30	47.80 $\pm$ 0.30	22 $\pm$ 1	40.0 $\pm$ 0.9	2.7	2.5	54	14	36	30	0.1
	50	60.35 $\pm$ 0.30	59.75 $\pm$ 0.30	25 $\pm$ 1	51.0 $\pm$ 0.9	3.1	3.0	67	18	43	42	0.1
	65	76.40 $\pm$ 0.30	75.70 $\pm$ 0.30	35 $\pm$ 1	67.0 $\pm$ 0.9	3.1	3.0	83	22	57	52	0.2
	75	89.45 $\pm$ 0.30	88.65 $\pm$ 0.30	40 $\pm$ 2	77.2 $\pm$ 0.9	3.6	3.4	97	25	65	58	0.2
	100	114.55 $\pm$ 0.35	113.55 $\pm$ 0.35	50 $\pm$ 2	98.8 $\pm$ 1.0	4.5	4.3	124	30	80	69	0.5
	125	140.70 $\pm$ 0.40	139.40 $\pm$ 0.40	65 $\pm$ 2	125.0 $\pm$ 1.2	5.4	4.7	151	38	103	90	0.8
	150	165.85 $\pm$ 0.45	164.25 $\pm$ 0.45	80 $\pm$ 2	145.8 $\pm$ 1.3	6.3	5.6	178	44	124	109	1.3

備考 1.JIS K6739規格品
2.許容差を明記していない寸法は、参考寸法です。

図名	DV継手 45° エルボ 〈45L〉	図番	2153-01-00 
株式会社クボタケミックス		年月日	2018.8.31 O