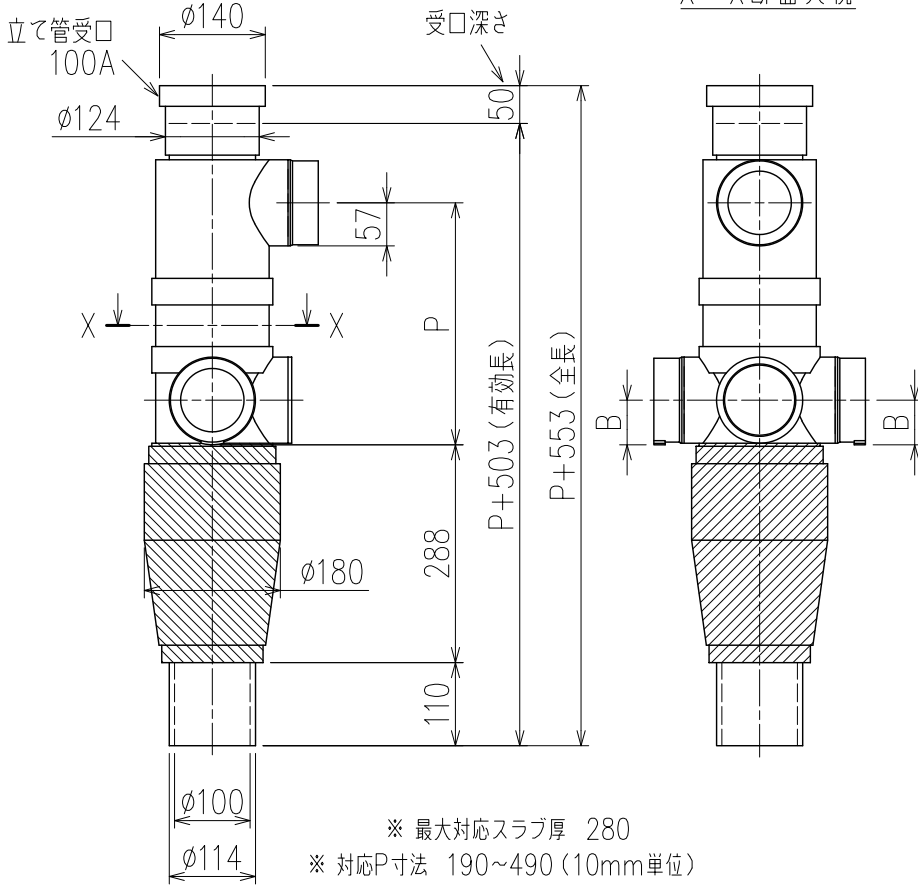
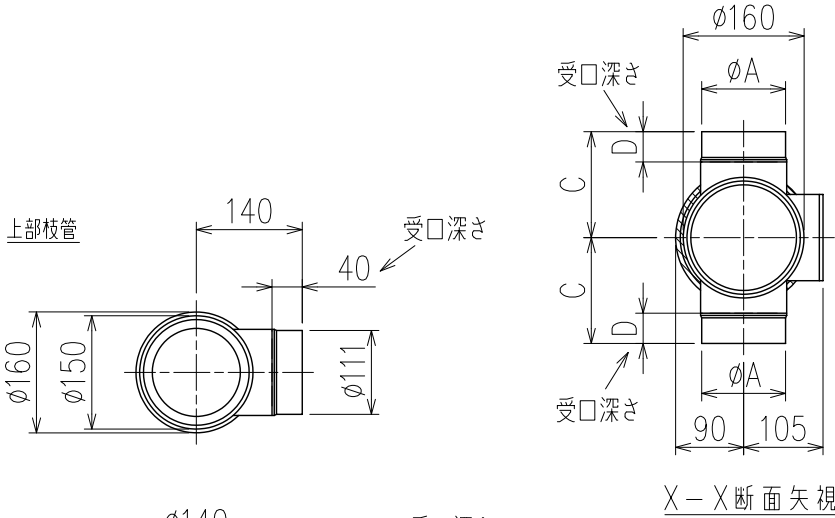


単位:mm

	横枝管サイズ			
	50(1)	65(2)	75(3)	100(4)
A寸法	78	97	111	140
B寸法	42	52	59	73
C寸法	140	140	140	210
D寸法	40	40	40	50















※ 最大対応スラブ厚 280

※ 対応P寸法 190~490 (10mm単位)

国土交通大臣認定・(一財)日本消防設備安全センター性能評定取得品
注)と採用にあたり、認定書及び評定書の内容をご確認ください。

下枝管バリエーション

	
B0101	B0102
	
B0103 (特)	B0104 (特)
	
B0201	B0202
	
B0203 (特)	B0204 (特)
	
B0301 (特)	B0302 (特)
	
B0303 (特)	B0304 (特)
	
B0401 (特)	B0402 (特)
	
B0403 (特)	B0404 (特)

(特) : 特注品。対向枝への排水の流入
が無いことを確認した場合のみ製作。

図名	4VSL2-A3-B0_0_-P___	図番	4VSL2-0006-001 
株式会社クボタケミックス	年月日	2024.4.10	T