


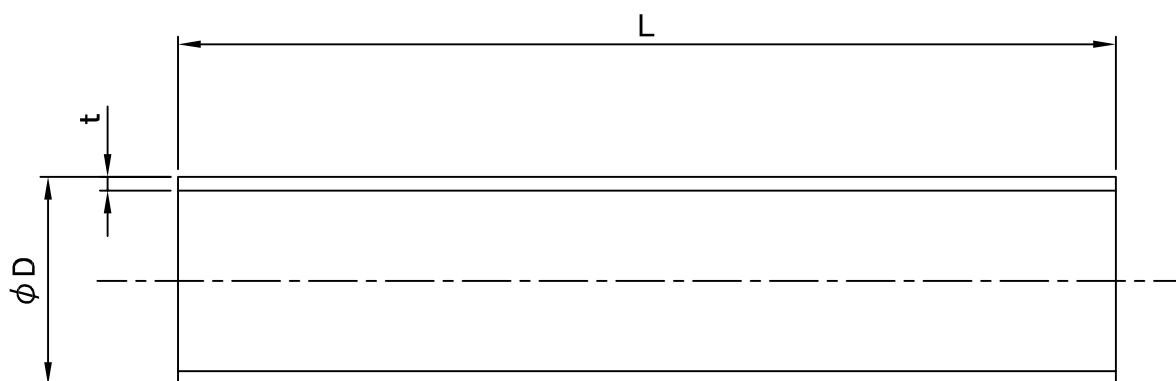

単位:mm

対象品	呼び径	D			t	近似内径	L +30 -10	参考質量 (kg)
		基本寸法	最大・最小外径 の許容差	平均外径 の許容差				
	13	18.0	±0.2	±0.2	2.5 ± 0.2	13	4000	0.7
	16	22.0	±0.2	±0.2	3.0 ± 0.3	16	4000	1.0
	20	26.0	±0.2	±0.2	3.0 ± 0.3	20	4000	1.2
	25	32.0	±0.2	±0.2	3.5 ± 0.3	25	4000	1.8
	30	38.0	±0.3	±0.2	3.5 ± 0.3	31	4000	2.1
	40	48.0	±0.3	±0.2	4.0 ± 0.3	40	4000	3.1
							5000	3.9
	50	60.0	±0.4	±0.2	4.5 ± 0.4	51	4000	4.4
							5000	5.5
	65	76.0	±0.5	±0.2	4.5 ± 0.4	67	4000	5.7
	75	89.0	±0.5	±0.2	5.9 ± 0.4	77	4000	8.6
							5000	10.8
	100	114.0	±0.6	±0.2	7.1 ± 0.5	100	4000	13.4
							5000	16.7
	125	140.0	±0.8	±0.3	7.5 ± 0.5	125	4000	17.5
	150	165.0	±1.0	±0.3	9.6 ± 0.6	146	4000	26.2
							5000	32.8

備考 1. JIS K6742規格品

2. 許容差を明記していない寸法は、参考寸法です。

図名	水道用耐衝撃性 硬質ポリ塩化ビニル管 (水道用HI・VP)	図番	6001-01-00 
	株式会社クボタケミックス		2017.2.6 ○