


(呼び径13~50mm)

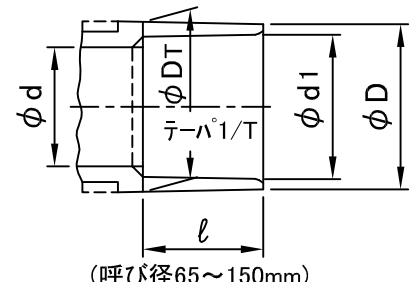


(呼び径65~150mm)

TS接合部

単位:mm

対象品	呼び径	D	DT	d1	1/T	$l \begin{smallmatrix} +4 \\ -0.5 \end{smallmatrix}$	d	Z	L±4	参考質量 (kg)
	16×13	16側 29.0 -0.7	29.0 -0.7	22.40±0.20	1/34	30	16	5	61	0.03
	13側 24.0 -0.6	24.0 -0.6	18.40±0.20	1/30	26	13				
	20×13	20側 33.0 -0.8	33.0 -0.8	26.45±0.20	1/34	35	20	7	68	0.03
	13側 24.0 -0.6	24.0 -0.6	18.40±0.20	1/30	26	13				
	20×16	20側 33.0 -0.8	33.0 -0.8	26.45±0.20	1/34	35	20	6	71	0.04
	16側 29.0 -0.7	29.0 -0.7	22.40±0.20	1/34	30	16				
	25×13	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25	20	86	0.05
	13側 24.0 -0.6	24.0 -0.6	18.40±0.20	1/30	26	13				
	25×16	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25	15	85	0.1
	16側 29.0 -0.7	29.0 -0.7	22.40±0.20	1/34	30	16				
	25×20	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25	9	84	0.1
	20側 33.0 -0.8	33.0 -0.8	26.45±0.20	1/34	35	20				
	30×20	30側 46.0 -1.0	46.0 -1.0	38.60±0.25	1/34	44	31	14	93	0.1
	20側 33.0 -0.8	33.0 -0.8	26.45±0.20	1/34	35	20				
	30×25	30側 46.0 -1.0	46.0 -1.0	38.60±0.25	1/34	44	31	9	93	0.1
	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25				
※40×20	40側 57.0 -1.2	57.0 -1.2	48.70±0.30	1/37	55	40	23	113	0.1	
	20側 33.0 -0.8	33.0 -0.8	26.45±0.20	1/34	35	20				
	40×25	40側 57.0 -1.2	57.0 -1.2	48.70±0.30	1/37	55	40	19	114	0.1
	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25				
	40×30	40側 57.0 -1.2	57.0 -1.2	48.70±0.30	1/37	55	40	15	114	0.1
	30側 46.0 -1.0	46.0 -1.0	38.60±0.25	1/34	44	31				
※50×25	50側 70.0 -1.5	70.0 -1.5	60.80±0.30	1/37	63	51	37	140	0.2	
	25側 40.0 -1.0	40.0 -1.0	32.55±0.25	1/34	40	25				
	50×30	50側 70.0 -1.5	70.0 -1.5	60.80±0.30	1/37	63	51	29	136	0.2
	30側 46.0 -1.0	46.0 -1.0	38.60±0.25	1/34	44	31				
	50×40	50側 70.0 -1.5	70.0 -1.5	60.80±0.30	1/37	63	51	18	136	0.2
	40側 57.0 -1.2	57.0 -1.2	48.70±0.30	1/37	55	40				
	65×50	65側 87.0 -1.5	88.5 -1.5	76.60±0.30	1/48	61	67	25	149	0.3
	50側 70.0 -1.5	70.0 -1.5	60.80±0.30	1/37	63	51				
	75×50	75側 102.0 -1.5	104.5 -1.5	89.60±0.30	1/49	64	77	38	165	0.5
	50側 70.0 -1.5	70.0 -1.5	60.80±0.30	1/37	63	51				
●75×65	75側 102.0 -1.5	104.5 -1.5	89.60±0.30	1/49	64	77	31	156	0.5	
	65側 87.0 -1.5	88.5 -1.5	76.60±0.30	1/48	61	67				
	100×75	100側 130.0 -1.8	133.5 -1.8	114.70±0.30	1/56	84	100	42	190	1.0
	75側 102.0 -1.5	104.5 -1.5	89.60±0.30	1/49	64	77				
	125×100	125側 157.0 -1.8	161.0 -1.8	140.85±0.35	1/58	104	125	42	230	1.5
	100側 130.0 -1.8	133.5 -1.8	114.70±0.30	1/56	84	100				
	150×100	150側 186.0 -2.0	190.0 -2.0	166.00±0.40	1/63	132	146	79	295	2.6
	100側 130.0 -1.8	133.5 -1.8	114.70±0.30	1/56	84	100				

- 備考 1. 無印はJIS K6743規格品
 2. ※印は日本水道協会承認の塩化ビニル管・継手協会団体規格品 (AS21)
 3. ●印はメーカー規格品
 4. 許容差を明記していない寸法は、参考寸法です。

図名	水道用硬質ポリ塩化ビニル管継手 〔耐衝撃性硬質ポリ塩化ビニル管継手〕 HI・TS径違いソケット(A形)《HIRS》	図番	6011-02-00 
	株式会社クボタケミックス		年月日