
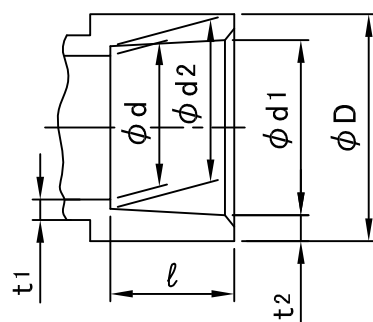


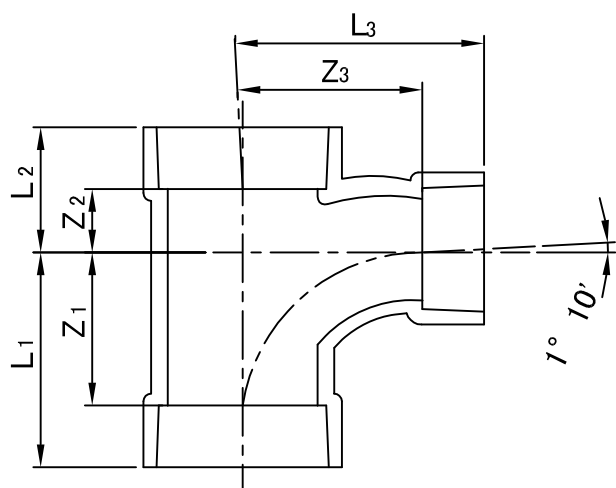

接合部寸法

単位: mm

対象品	呼び径		d1	d2	ℓ	d	t1 (最小)	t2 (最小)	D	Z1	Z2	Z3	L1	L2	L3	参考質量 (kg)
	50×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	2.7	2.5	54	52	23	57	77	48	79	0.1
		50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67							
	65×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	2.7	2.5	54	52	24	66	87	59	88	0.2
		65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83							
	65×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	66	27	74	101	62	99	0.3
		65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83							
	75×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	66	29	79	106	69	104	0.3
		75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97							
	75×65	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83	90	32	95	130	72	130	0.4
		75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97							
	100×40	40	48.30±0.30	47.80±0.30	22±1	40.0±0.9	2.7	2.5	54	52	28	82	102	78	104	0.5
		100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124							
	100×50	50	60.35±0.30	59.75±0.30	25±1	51.0±0.9	3.1	3.0	67	66	32	90	116	82	115	0.6
		100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124							
	100×65	65	76.40±0.30	75.70±0.30	35±1	67.0±0.9	3.1	3.0	83	90	36	107	140	86	142	0.7
		100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124							
	100×75	75	89.45±0.30	88.65±0.30	40±2	77.2±0.9	3.6	3.4	97	100	33	110	150	83	150	0.8
		100	114.55±0.35	113.55±0.35	50±2	98.8±1.0	4.5	4.3	124							

- 備考
1. JIS K 6739 規格品
 2. 色は青みがかった透明です。
 3. 許容差を明記していない寸法は、参考寸法です。

図名	透明DV継手 径違い 90° 大曲りY 〈LT〉	図番	2155-09-01 
	株式会社クボタケミックス	年月日	2016.5.1 O